


**Alpha Bridge  
ASFP-1G-T  
Datasheet**



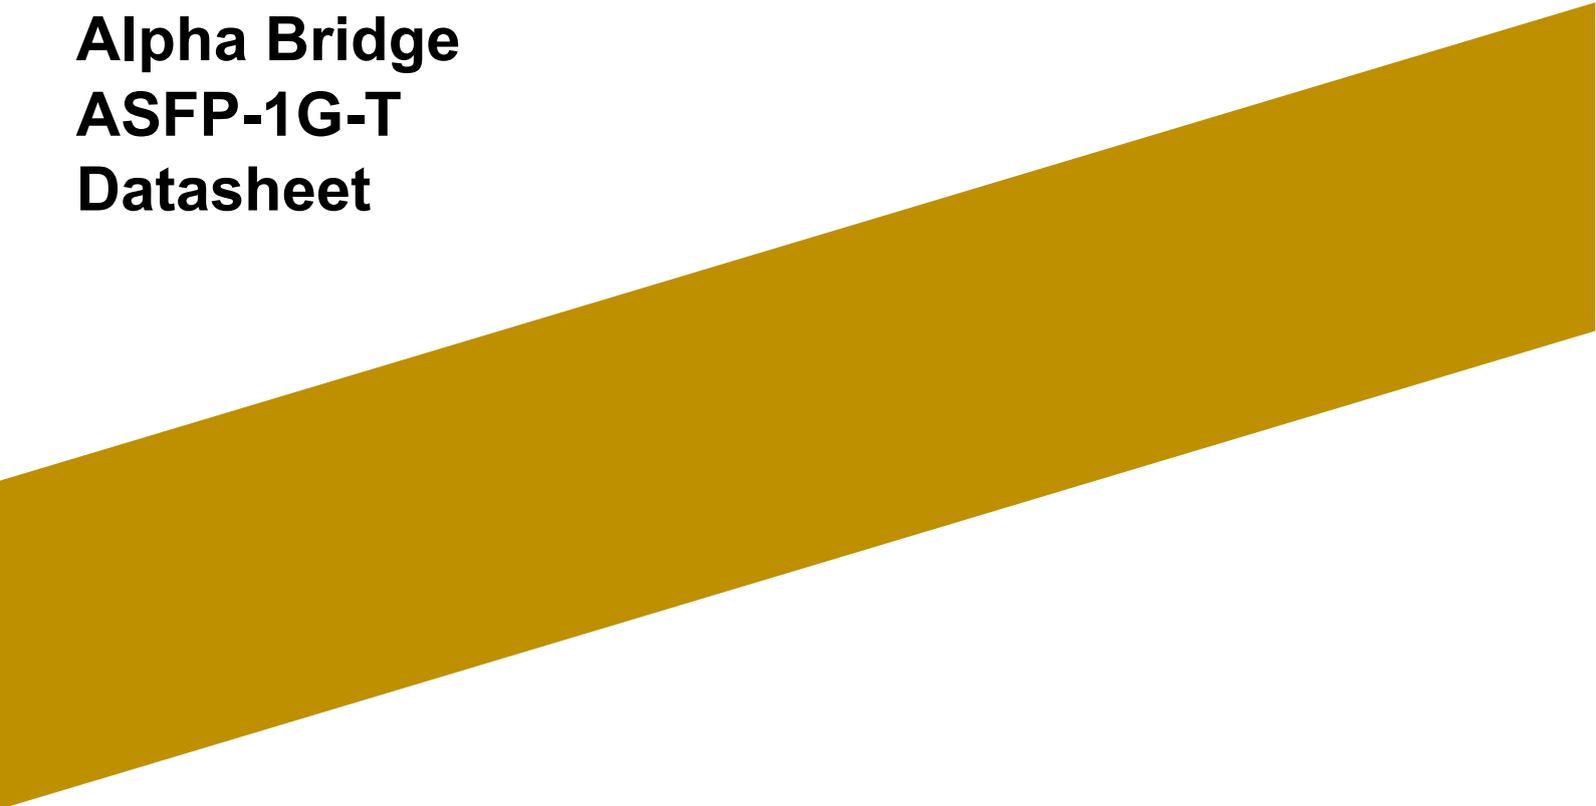

### Features

- Compliant with IEEE 802.3ab/ Gigabit Ethernet Standard
- Compliant with SFP MSA specifications.
- Hot-pluggable SFP footprint
- 10/100/1000BASE-T operation in the host system with SGMII interface
- EEPROM with Serial ID functionality
- Hot-pluggable capability
- Compliant with industry standard RFT electrical connector and cage
- Internal PHY IC is configurable by host system software via SFP 2-wire interface
- Support MDIX
- Compliant with RoHS

### Applications

- Gigabit Ethernet over copper.
- Switch to switch interface.
- Switched backplane applications.
- File server interface

### Performance

- ASFP-1G-T data link up to 100 m on standard CAT 5 UTP

### Absolute Maximum Ratings

| Parameter           | Symbol | Min. | Max. | Units | Note |
|---------------------|--------|------|------|-------|------|
| Storage Temperature | Ts     | -40  | 85   | °C    |      |
| Supply Voltage      | VCC    | 0    | 5    | V     |      |

### Recommended Operating Conditions

| Parameter             | Symbol | Min.  | Max.  | Units | Note |
|-----------------------|--------|-------|-------|-------|------|
| Operating Temperature | Tc     | 0     | 70    | °C    |      |
| Supply Voltage        | VCC    | 3.135 | 3.465 | V     |      |

### Electrical Characteristics


V<sub>CC</sub>=3.135 V to 3.465 V, T<sub>c</sub>=0 °C to 70 °C

| Parameter                        | Symbol           | Min. | Typ. | Max.    | Units | Note |
|----------------------------------|------------------|------|------|---------|-------|------|
| Supply Current                   | ICC              | ---  | 350  | 400     | mA    |      |
| <b>Transmitter</b>               |                  |      |      |         |       |      |
| Data Input Differential Voltage  | VD,TX            | 0.5  | ---  | 2.4     | V     | 1    |
| Differential Input Impedance     | ZTX              | 80   | 100  | 120     | Ohm   |      |
| Transmitter Disable Input-High   | VDIS H           | 2.0  | ---  | VCC+0.3 | V     |      |
| Transmitter Disable Input-Low    | VDIS L           | 0    | ---  | 0.8     | V     |      |
| <b>Receiver</b>                  |                  |      |      |         |       |      |
| Data Output Differential Voltage | VD,R X           | 0.35 | ---  | 2       | mV    | 3    |
| Differential Output Impedance    | ZRX              | 80   | 100  | 120     | Ohm   |      |
| Data Output Rise/Fall Time       | tr, R x / tf, Rx | ---  | 180  | ---     | Ps    | 4    |
| LOS Output Voltage-High          | VLO IS H         | 2    | ---  | VCC+0.3 | V     | 2    |
| LOS Output Voltage -Low          | VLO S L L        | 0    | ---  | 0.8     | V     | 2    |

#### NOTES:

1. Internally AC coupled and terminated to 100-Ohm differential load.
2. Pull up to V<sub>CC</sub> with a 4.7K – 10K Ohm resistor on host Board
3. Internally AC coupled but requires a 100-Ohm differential termination at MAC side.
4. These are unfiltered 20%~80% values

## Pin Assignment

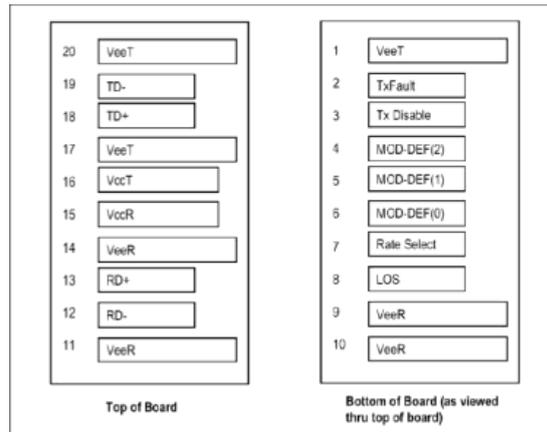

## Pin Definitions


| Pin | Name        | Function                     | Plug | Notes                                    |
|-----|-------------|------------------------------|------|--|
| 1   | VeeT        | Transmitter Ground           | 1    | Note 5                                   |
| 2   | TX Fault    | Transmitter Fault Indication | 3    | Note 1 - Function not available          |
| 3   | TX_Disable  | Transmitter Disable          | 3    | Note 2 - Module disables on high or open |
| 4   | MOD-DEF2    | Module Definition 2          | 3    | Note 3 - Two-wire serial ID interface    |
| 5   | MOD-DEF1    | Module Definition 1          | 3    | Note 3 - Two-wire serial ID interface    |
| 6   | MOD-DEF0    | Module Definition 0          | 3    | Note 3 - grounded in module              |
| 7   | Rate Select | Not Connect                  | 3    | Function not available                   |
| 8   | LOS         | Loss of Signal               | 3    | Note 4 - Function not available          |
| 9   | VeeR        | Receiver Ground              | 1    | Note 5                                   |
| 10  | VeeR        | Receiver Ground              | 1    | Note 5                                   |
| 11  | VeeR        | Receiver Ground              | 1    | Note 5                                   |
| 12  | RD-         | Inverse Received Data Out    | 3    | Note 6                                   |
| 13  | RD+         | Received Data Out            | 3    | Note 6                                   |
| 14  | VeeR        | Receiver Ground              | 1    | Note 5                                   |
| 15  | VccR        | Receiver Power               | 2    | Note 7 - 3.3V ± 5%                       |
| 16  | VccT        | Transmitter Power            | 2    | Note 7 - 3.3V ± 5%                       |
| 17  | VeeT        | Transmitter Ground           | 1    | Note 5                                   |
| 18  | TD+         | Transmitter Data In          | 3    | Note 8                                   |
| 19  | TD-         | Inverse Transmitter Data In  | 3    | Note 8                                   |
| 20  | VeeT        | Transmitter Ground           | 1    | Note 5                                   |

### Notes:

- TX Fault is not supported and tied to ground within the module.
- TX disable is an input that is used to reset the chip of Gigabit Ethernet PHY inside the copper SFP. It is pulled up within the module with a 4.7 – 10 KΩ resistor.  
 Low (0 – 0.8V): PHY IC on  
 (>0.8, < 2.0V): Undefined  
 High (2.0 – 3.465V): PHY IC Disabled Open: PHY IC Disabled
- These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be VccT or VccR. MOD-DEF 0 is grounded in the module to indicate that the module is present. MOD-DEF 1 and MOD-DEF 2 are the clock and data lines of the two-wire serial interface, respectively.
- LOS (Loss of Signal) is not available and tied to ground within the module.
- VeeR and VeeT are internally connected within the copper SFP.
- RD+ and RD- are the received differential outputs, and they are AC-coupled 100~ differential lines that should be terminated with 100~ (differential) at user's SERDES. The AC coupling is done inside the copper SFP and thus not required on the host board. The differential voltage swing will be between 250mV and 625 mV, while properly terminated.

- 7) VccR and VccT are the receiver and transmitter power supplies, and they are internally connected within the copper SFP. The power rail is defined as 3.3V ±5% at the SFP connector pin.
- 8) TD+ and TD- are the transmitted differential inputs, and they are terminated with 100Ω differential load inside the module. The AC coupling is done inside the module, and thus not required on the host board.

### Dimensions

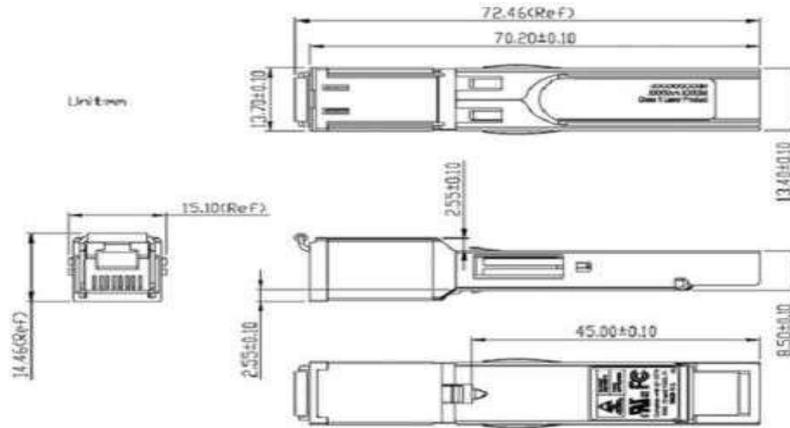

### ASFP-1G-T EEPROM Serial ID Information

ASFP-1G-T Provides 128-byte EEPROM, which can be accessed via the 2-wire serial communication protocol per SFP MSA with a device address of 0xA0.

| Address | Hex | ASCII | Address | Hex | ASCII | Address | Hex | ASCII  | Address | Hex | ASCII  | Address | Hex | Address | Hex | ASCII  |
|---------|-----|-------|---------|-----|-------|---------|-----|--------|---------|-----|--------|---------|-----|---------|-----|--------|
| 0       | 3   |       | 25      | 68  | h     | 50      | 30  | 0      | 75      | SN  |        | 100     | 0   | 125     | 0   |        |
| 1       | 4   |       | 26      | 20  |       | 51      | 2D  | -      | 76      | SN  |        | 101     | 0   | 126     | 0   |        |
| 2       | 0   |       | 27      | 20  |       | 52      | 43  | C      | 77      | SN  |        | 102     | 0   | 127     | 0   | Note 5 |
| 3       | 0   |       | 28      | 20  |       | 53      | 32  | 2      | 78      | SN  |        | 103     | 0   |         |     |        |
| 4       | 0   |       | 29      | 20  |       | 54      | 20  |        | 79      | SN  |        | 104     | 0   |         |     |        |
| 5       | 0   |       | 30      | 20  |       | 55      | 20  |        | 80      | SN  |        | 105     | 0   |         |     |        |
| 6       | 8   |       | 31      | 20  |       | 56      | 30  | 0      | 81      | SN  |        | 106     | 0   |         |     |        |
| 7       | 0   |       | 32      | 20  |       | 57      | 30  | 0      | 82      | SN  |        | 107     | 0   |         |     |        |
| 8       | 0   |       | 33      | 20  |       | 58      | 30  | 0      | 83      | SN  |        | 108     | 0   |         |     |        |
| 9       | 0   |       | 34      | 20  |       | 59      | 30  | 0      | 84      | DC  | Note 3 | 109     | 0   |         |     |        |
| 10      | 0   |       | 35      | 20  |       | 60      | 0   |        | 85      | DC  |        | 110     | 0   |         |     |        |
| 11      | 1   |       | 36      | 0   |       | 61      | 0   |        | 86      | DC  |        | 111     | 0   |         |     |        |
| 12      | 0D  |       | 37      | 0   |       | 62      | 0   |        | 87      | DC  |        | 112     | 0   |         |     |        |
| 13      | 0   |       | 38      | 0   |       | 63      | CS1 | Note 1 | 88      | DC  |        | 113     | 0   |         |     |        |
| 14      | 0   |       | 39      | 0   |       | 64      | 0   |        | 89      | DC  |        | 114     | 0   |         |     |        |
| 15      | 0   |       | 40      | 4F  | O     | 65      | 12  |        | 90      | DC  |        | 115     | 0   |         |     |        |
| 16      | 0   |       | 41      | 50  | P     | 66      | 0   |        | 91      | DC  |        | 116     | 0   |         |     |        |
| 17      | 0   |       | 42      | 36  | 6     | 67      | 0   |        | 92      | 0   |        | 117     | 0   |         |     |        |

|    |    |   |    |    |   |    |    |        |    |     |        |     |   |  |  |  |
|----|----|---|----|----|---|----|----|--------|----|-----|--------|-----|---|--|--|--|
| 18 | 64 |   | 43 | 43 | C | 68 | SN | Note 2 | 93 | 0   |        | 118 | 0 |  |  |  |
| 19 | 0  |   | 44 | 2D | - | 69 | SN |        | 94 | 0   |        | 119 | 0 |  |  |  |
| 20 | 4F | O | 45 | 54 | T | 70 | SN |        | 95 | CS2 | Note 4 | 120 | 0 |  |  |  |
| 21 | 70 | p | 46 | 58 | X | 71 | SN |        | 96 | 0   |        | 121 | 0 |  |  |  |
| 22 | 74 | t | 47 | 31 | 1 | 72 | SN |        | 97 | 0   |        | 122 | 0 |  |  |  |
| 23 | 65 | e | 48 | 2D | - | 73 | SN |        | 98 | 0   |        | 123 | 0 |  |  |  |
| 24 | 63 | c | 49 | 30 | 0 | 74 | SN |        | 99 | 0   |        | 124 | 0 |  |  |  |

**Notes:**

- 1) Byte 63(CS1): Check sum of bytes 0-62.
- 2) Byte 68-83 (SN): Serial number.
- 3) Byte 84-91 (DC): Date code.
- 4) Byte 95 (CS2): Check sum of bytes 64-94.
- 5) Bytes 128-255 had been set hex. 00.

**Ordering Information**

| Model Number | Part Number    | Distance | Voltage | Temperature  |
|--------------|----------------|----------|---------|--------------|
| ASFP-1G-T    | OP6C-TX1-00-C1 | 100m     | 3.3V    | 0°C to 70 °C |

Note: All information contained in this document is subject to change without notice.

**Copyright @ Alpha Bridge Technologies Private Limited**

This document is ABTPL Public Information. ABTPL reserves the right to alter, update and otherwise change the information contained in the document from time to time. [www.alpha-bridge.tech](http://www.alpha-bridge.tech). V.1.0.27. January.2026