


**Alpha Bridge
AB-SFP+-80
Datasheet**



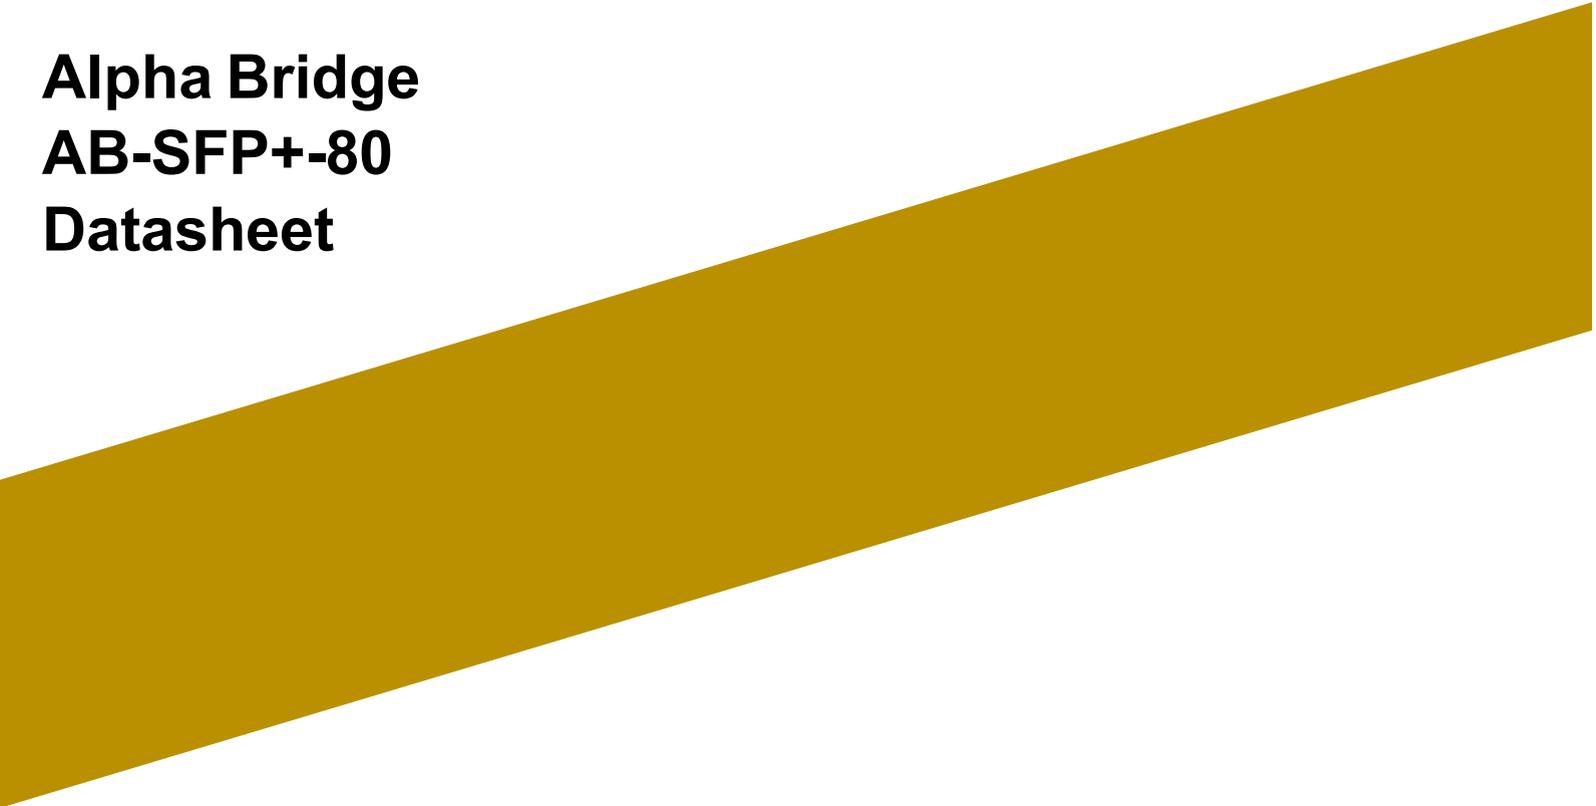

Features

- Compliant with SFF-8431 and IEE802.3ae
- Data rate selectable ≤4.25Gbps or 9.95Gbps to 11.3Gbps bit rates
- Cooled EML transmitter and APD receiver
- link length up to 80km
- Low Power Dissipation 1.4W Typical (Maximum:2W)
- Single 3.3V power supply
- Diagnostic Performance Monitoring of module temperature, supply Voltages, laser bias current, transmit optical power, receive optical power
- RoHS compliant and lead-free

Applications

- 10G Ethernet
- 10G Fiber Channel (with/without FEC)

Description

SFP+ZR Transceiver is designed for 8.5G/10G Fiber-Channel and 10GBE applications. The transceiver consists of two sections: The transmitter section incorporates a cold EML laser. The receiver section consists of an APD photodiode integrated with a TIA. All modules satisfy class I laser safety requirements. SFP+ZR Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	3.8	V
Storage Temperature	Tst	-40	85	°C
Relative Humidity	Rh	0	85	%

Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	Vcc	3.13	3.3	3.47	V
Supply current [1]	Icc		420	610	mA
Operating Case Temperature	Tca	-5	-	70	°C
Module Power Dissipation [2]	Pm	-	1.4	2	W

Notes:

- Supply current is shared between VCCTX and VCCR. Typical Supply current test at 25°C , Max Supply current test at 60~70°C
- In-rush is defined as current level above steady state current requirements

Transmitter Specifications – Optical

Parameter	Symbol	Min	Typical	Max	Unit
Center Wavelength	c	1528		1565	nm
Optical Average Power	Po	0	-	4	dBm
Side Mode Suppression Ratio	SMSR	30	-	-	dB
Optical Transmit Power (disabled)	PTX_DISABLE	-	-	-30	dBm
Extinction Ratio	ER	9		-	dB
RIN210MA				-128	dB/Hz

Optical Return Loss Tolerance				21	dB
Dispersion penalty(1600ps/nm)	DP			2	dB

Transmitter Specifications – Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Data Rate	Mra	-	10.3	11.3	Gbps
Input differential impedance	Rim	-	100	-	Ω
Differential data Input	VtxDIFF	120	-	850	mV
Transmit Disable Voltage	VD	2	-	Vcc3+0.3	V
Transmit Enable Voltage	Ven	0	-	0.8	V
Transmit Disable Assert Time	Vn	-	-	100	us

Receiver Specifications – Optical

Parameter	Symbol	Min	Typical	Max	Unit
Input Operating Wavelength	λ	1110	-	1650	nm
Receiver sensitivity [1]		-	-	-24	dBm
Maximum Input Power	RX-overload	-	-	-8	dBm
Loss of Signal Asserted		-34	-	-	dBm
LOS De-Asserted		-	-	-24	dBm

Notes: Measured with conformance test signal for BER = 10⁻¹². PRBS31, Data Rate=10.3Gbps.

Receiver Specifications – Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Data Rate	Mra	-	10.3	11.3	Gbps
Differential Output Swing	Vout P-P	350	-	850	mV
Rise/Fall Time	Tr / Tf	24	-	-	ps
Loss of Signal –Asserted	VOH	2	-	Vcc3+0.3-	V
Loss of Signal –Negated	VOL	0	-	0.4	V

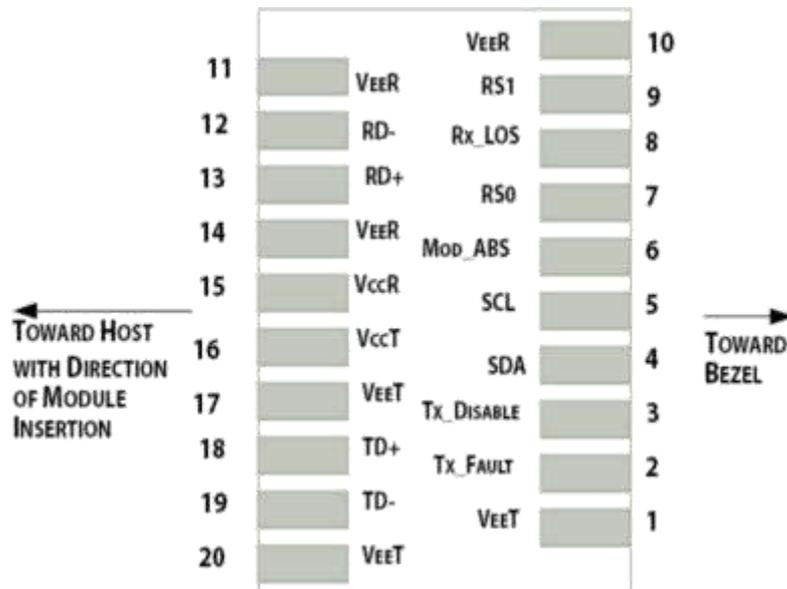


Figure1. Electrical Pin-out Details

Pin Descriptions

Pin	Symbol	Name/Description												
1	VEET [1]	Transmitter Ground												
2	Tx_FAULT [2]	Transmitter Fault												
3	Tx_DIS	Transmitter Disable. Laser output disabled on high or open												
4	SDA [2]	2-wire Serial Interface Data Line												
5	SCL [2]	2-wire Serial Interface Clock Line												
6	MOD_ABS [4]	Module Absent. Grounded within the module												
7	RS0 [5]	RS0 for Rate Select: Open or Low = Module supports ≤4.25Gbps High = Module supports 9.95 Gb/s to 10.3125 Gb/s												
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation												
9	RS1 [5]	No connection required												
10	VEER [1]	Receiver Ground												
11	VEER [1]	Receiver Ground												
12	RD-	Receiver Inverted DATA out. AC Coupled												
13	RD+	Receiver DATA out. AC Coupled												
14	VEER [1]	Receiver Ground												
15	VCCR	Receiver Power Supply												
16	VCCT	Transmitter Power Supply	17	VEET [1]	Transmitter Ground	18	TD+	Transmitter DATA in. AC Coupled	19	TD-	Transmitter Inverted DATA in. AC Coupled	20	VEET [1]	Transmitter Ground
17	VEET [1]	Transmitter Ground												
18	TD+	Transmitter DATA in. AC Coupled												
19	TD-	Transmitter Inverted DATA in. AC Coupled												
20	VEET [1]	Transmitter Ground												

Notes:

- Module circuit ground is isolated from module chassis ground within the module.
- should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
- Tx_Disable is an input contact with a 4.7 kΩ to 10 kΩ pullup to VccT inside the module.
- Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
- RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module

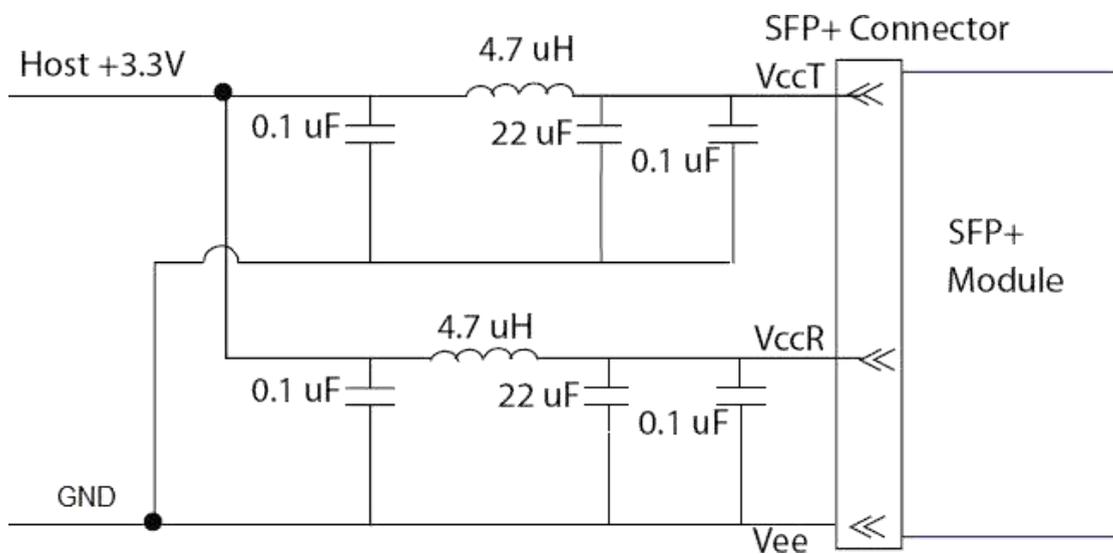


Figure2. Host Board Power Supply Filters Circuit


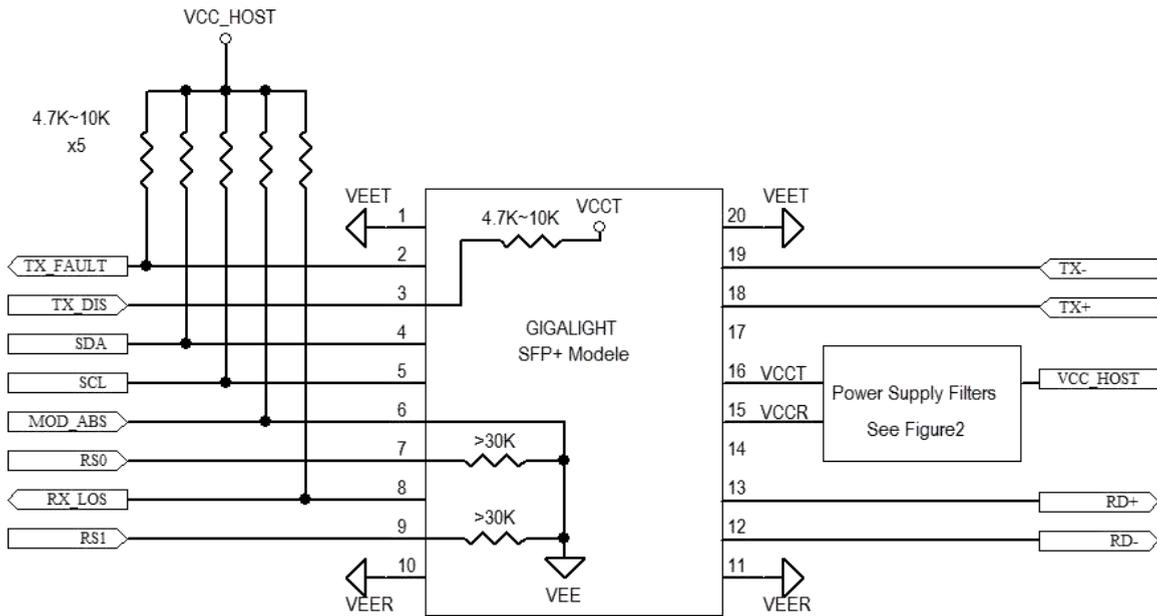


Figure3. Host-Module Interface

Mechanical Specifications

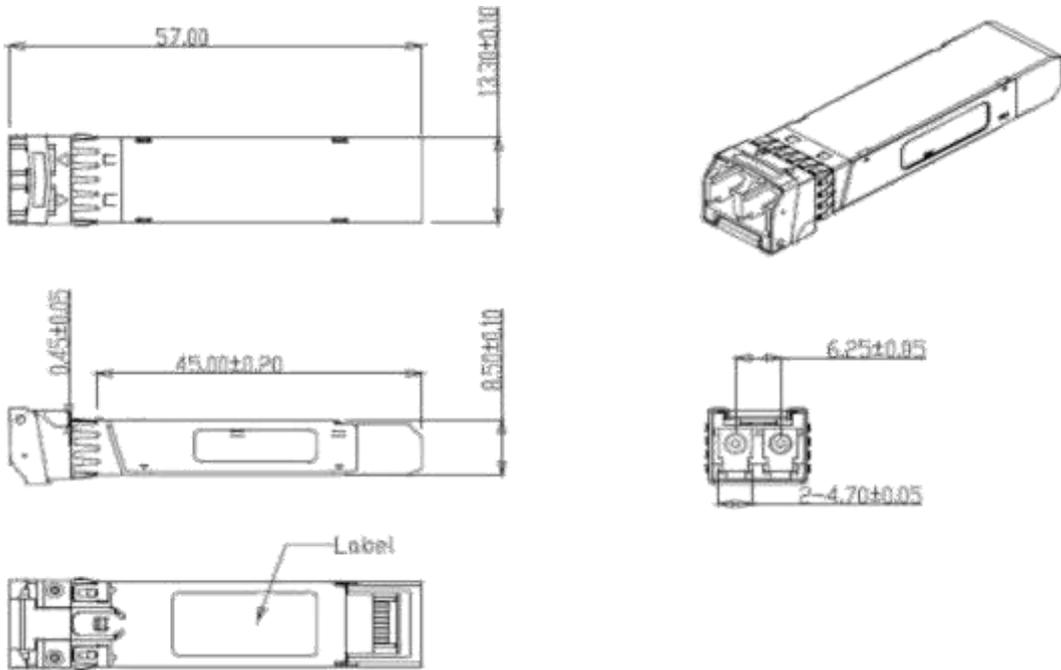

Ordering information

Part Number	Product Description
AB-SFP+-80	10Gbps 1550nm 80km LC SFP+, 0°C ~ +70°C
AB-SFP+-80-I	10Gbps 1550nm 80km LC SFP+, -40°C ~ +85°C

Note: All information contained in this document is subject to change without notice